

» WINDSHIELD PRO «

Model No.:12020303000000



Document-No.: FC-90008
Issue: August 2017



WELCOME

Thank you for purchasing this Westfield Outdoors windshield. Please read these instructions for use fully and carefully before using your awning. Please observe the care and safety instructions.

SUMMARY

ASSEMBLY PARTS LIST

1-2

RECOMMENDATIONS

2

GENERAL CARE AND USAGE INSTRUCTIONS

2


PITCHING INSTRUCTIONS

3-6




KEEP THIS MANUAL FOR FUTURE REFERENCE.

Model No.12020303000000

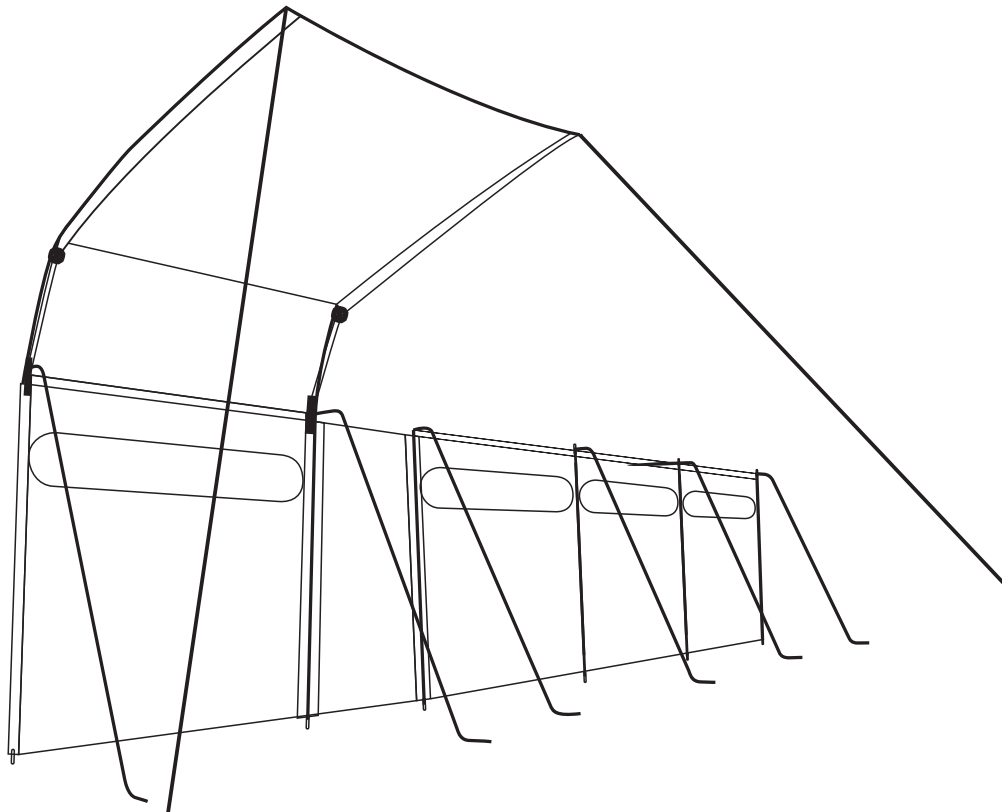


ASSEMBLY PARTS LIST




x1

Carry Bag

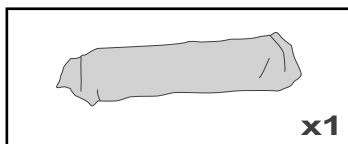


x1

Panel

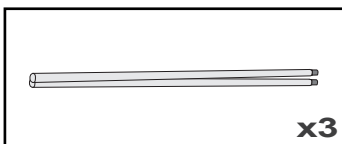


x3

Connection Pole




x4

Leg Pole

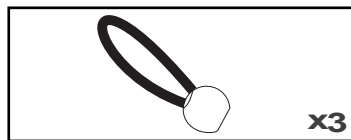


x3

Elastic Ring




x11

Metal Peg



x4


Telescopic Support Pole

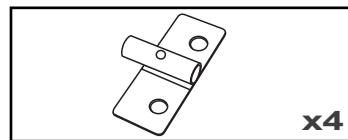

x4


Metal Foot

OPTIONAL ADDITIONAL PANEL (Model No.:12020303001000)




x1

Additional Panel

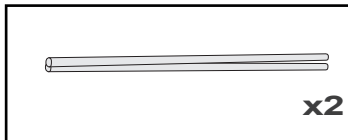


x2

8 Connection Channel

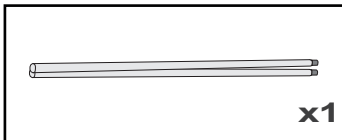


x1

Connection Pole

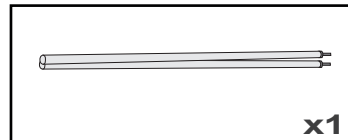


x1

Leg Pole




x1

Elastic Ring




x3

Metal Peg




x1

Telescopic Support Pole



x1

Metal Foot



x1


Carry Bag

OPTIONAL DOOR PANEL (Model No.:12020303002000)




x1

Carry Bag




x1

Additional Door Panel




x2

8 Connection Channel

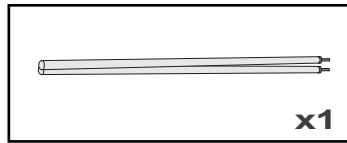


x1

Leg Pole

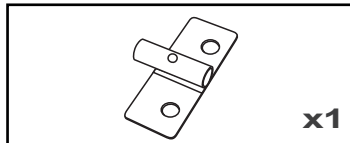


x1

Metal Foot



x3

Metal Peg



x1


Telescopic Support Pole

OPTIONAL BBQ PANEL (Model No.:12020303003000)




x1

Carry Bag




x1

Additional BBQ Panel

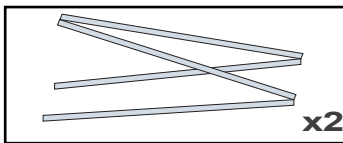


x2

Aluminum Pole

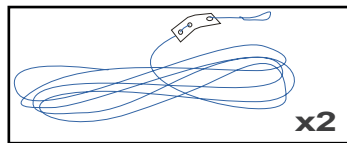


x2

Guy Rope




x2

Metal Foot

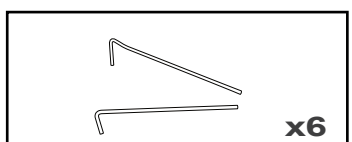

x6

Metal Peg

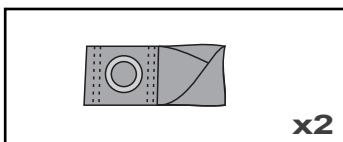

x2

Fixed Webbing

RECOMMENDATIONS

- Please lay down a groundsheet in advance, to prevent your windshield fabric becoming wet, dirt and damage, before uppacking.
- Assemble the windshield at home before setting off on your trip in order to familiarise yourself with its assembly and ensure you have not forgotten anything, especially the first use.
- Choose preferably a smooth, level site and remove all sharp objects.
- This windshield is designed as a touring awning and for touring use in light to moderate weather. During strong winds or snowfall we recommend that you take the windshield down. This windshield is not designed for static, seasonal, permanent pitching or commercial use.

GENERAL CARE AND USAGE INSTRUCTIONS

U.V. Degradation

Any fabric can be weakened by prolonged exposure to sunlight. Under normal holiday use your windshield will give long service. This degradation can be lessened by the use of proofing solutions such as Fabsil. Once a year (just before you put the windscreen away) cover the fabric with your preferred proofing solution. This will not only help against U.V. degradation, but improves waterproofing and lengthens the life span of your windshield. UV degradation is not covered under the warranty.

Usage

This awning is designed as a touring windshield and for touring use in light to moderate weather. During strong winds or snowfall we recommend that you take the windshield down. This awning is not designed for static, seasonal, permanent pitching or commercial use. Disregarding this could lead to invalidation of your warranty.

Storage


Store in a well-ventilated dry place. A wet/damp fabric will develop mildew surprisingly quickly. Dirty awnings can be washed using clean water and a soft brush. Do not scrub and never use detergents.

Safety

NEVER cook or use any naked flame near the windshield.

PITCHING INSTRUCTIONS

1

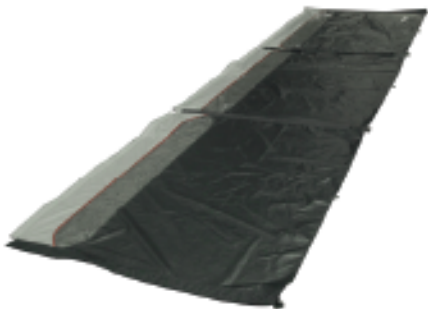


- Unpack the windshield pro and unfold the fabric onto the ground.
- Insert the leg poles into the sleeves.
- Slide the top cross poles into their sleeves.

As shown in the diagram:

- Make up the leg support poles by fitting the two poles together.
- Then stand the windshield up and push the bottom leg spikes into the ground.

1

2

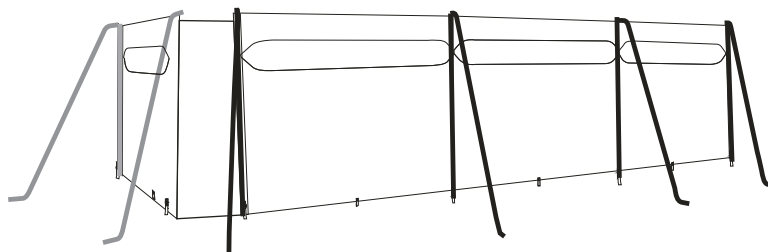


- Connect the top connection poles over the pin on the leg poles.
- Then attach the leg support poles one by one making sure the black bracket fits over the pin and under the cross pole bracket as shown on the diagram.



2

PITCHING INSTRUCTIONS

3

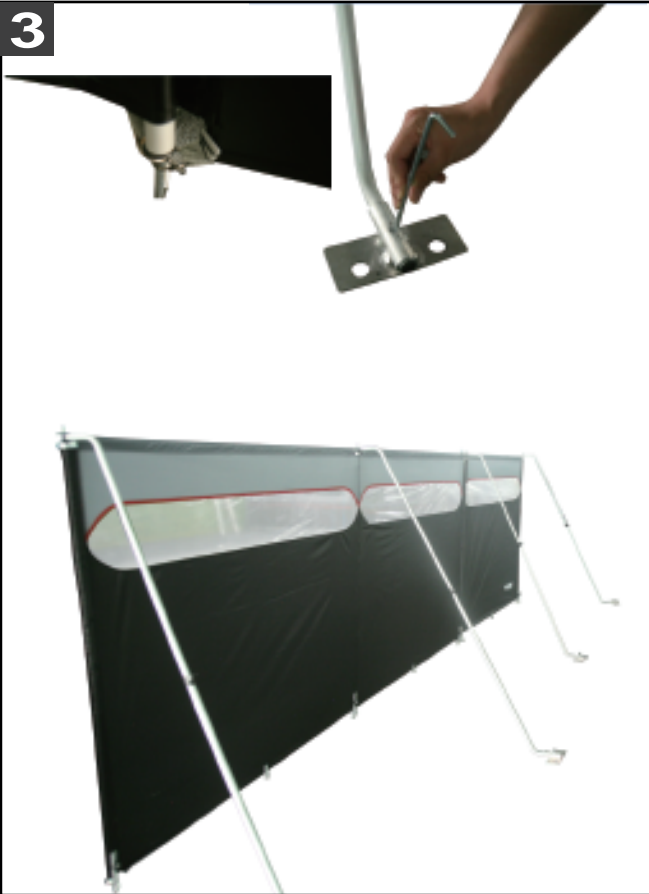

- You are ready to pitch your windshield.
- Easier with two persons one can hold the windshield in place while the other secures the fittings.

- Firstly insert the base plate over the bottom of the leg and secure with the metal peg then peg the base plate to the ground, once you have pegged all the legs and base plates you can adjust the length of the legs with the small black adjusting clamp to make sure the windshield is level.

- Then using the pegging bands provided peg the windshield all the way along the bottom of the fabric until secure.

- Once pegged the windshield should be tight and without too many creases although this will depend on the ground conditions.

TIP:

- The legs of the Windshield can be used on alternate sides of the windshield for extra stability.
- Windshield Pro can be connected to the awning rail on your van via the special beading fitted.
- The optional additional panel and door panel available from your retailer.

3

PITCHING INSTRUCTIONS (OPTIONAL)

O1



Optional Additional Panel

- You can extend the windshield pro by connecting the optional additional panel available from your retailer.

- Simply slide the figure of eight connection channel onto the beading on the end of your Windshield Pro making sure it slides into the stopper at the bottom of the beading then slide the beading on the additional panel onto the other side of the figure of eight channel fit the cross pole and extra leg and peg down.

- You can keep extending the windshield as much as you like.

OPTIONAL

1

PITCHING INSTRUCTIONS (OPTIONAL)

O2



Optional Door Panel

- You may need this door panel once the windshield is used to be enclosed completely.
- Simply slide the figure of eight connection channel onto the beading on the end of your Windshield Pro making sure it slides into the stopper at the bottom of the beading then slide the beading on the door panel onto the other side of the figure of eight channel fit the cross pole and extra leg and peg down.
- You can open the door by zipper at one side.




OPTIONAL

2

PITCHING INSTRUCTIONS (OPTIONAL)

O3

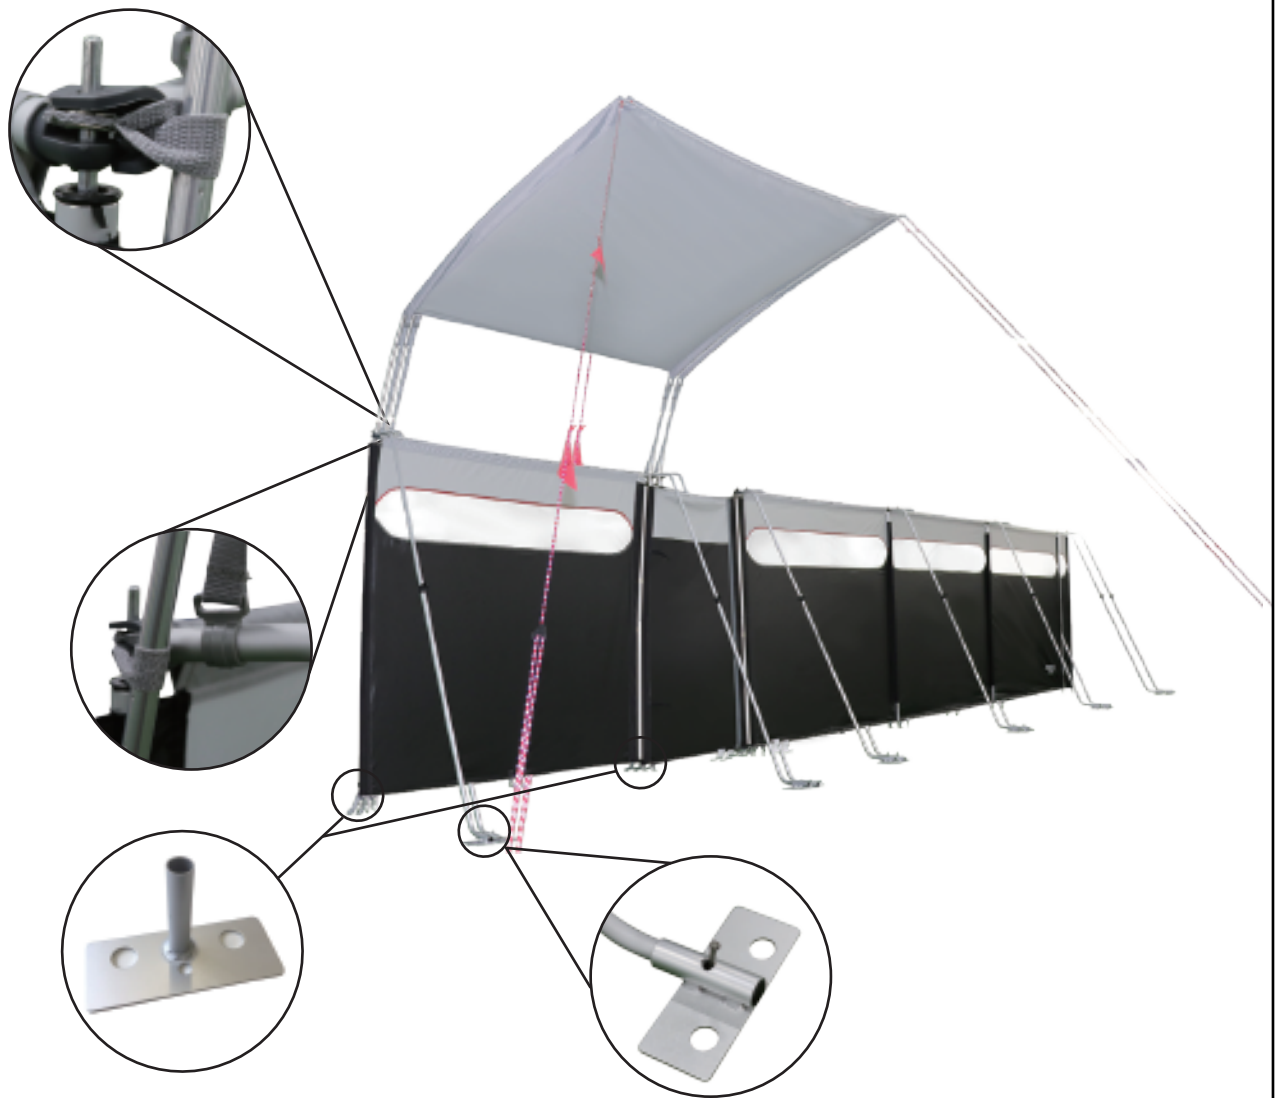

Extension roof element

1. You can expand your windscreen by a separate roof panel.
2. Assemble all the aluminium poles and fix the poles by using the webbing loop and the base plate to the windshield.
3. Attach the roof panel to the poles. Fix plastic hooks off the roof panel to the windshield. Guy out the roof by using the guy ropes and steel pegs.

OPTIONAL

3

Westfield Outdoors GmbH

Siemesdyk 60
47807 Krefeld
Germany

Drawings in this manual are for illustration purposes only, actual product may vary. Manufacturer reserves the right to change any specification or features without prior notice. Should you have any questions about your product or experience any difficulties, please contact the retailer from which you purchased the product. Your local retailer is in the best position to promptly address any requirements.